

PIPE CONNECTIONS



TYPE: GMV-W-C-W01

TYPE Tube end

DIFFERENT SIZES AND WALL THICKNESS

MATERIAL SS AISI 316L (w.nr. 1.4404)

[Page 167](#)

QUICK COUPLINGS



TYPE: GMV-CG-D-DW

TYPE Boost Cam & Groove coupler

STANDARD Federal Mil A-A-59326A

MATERIAL SS AISI 316 (w.nr. 1.4408)

[Page 168](#)



TYPE: GMV-CG-D-AW

TYPE Cam & Groove Adaptor

STANDARD Federal Mil A-A-59326A

MATERIAL SS AISI 316 (w.nr. 1.4408)

[Page 169](#)



TYPE: GMV-GU-D-WL

TYPE Guillemin coupling with locking ring

STANDARD NF E29-572

MATERIAL SS AISI 316 (w.nr. 1.4401)

[Page 170](#)

TYPE: GMV-W-C-W01

TUBE END

TYPE

Tube end

STANDARD


- ISO 10806:2003

MATERIAL

- SS AISI 316L (w.nr. 1.4404)

OTHER SPECIFICATION

- Material certificate acc. EN10204:2004 type 3.1
- Optional: other sizes and wall thickness

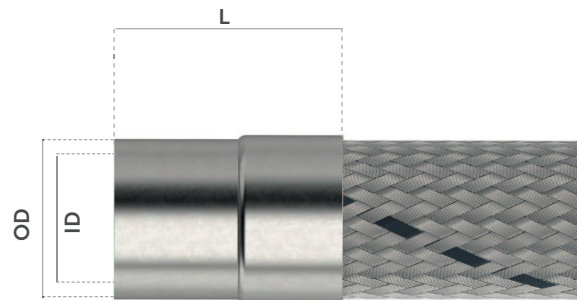

TYPE: GMV-W-C-W01

Code	For hose ID		ID		OD	
	NB	inch	mm	inch	mm	inch
GMV-W-C-W01-1/2"	DN12	1/2"	11,28	0,44	21,3	0,84
GMV-W-C-W01-3/4"	DN20	3/4"	21,78	0,86	26,67	1,05
GMV-W-C-W01-1"	DN25	1"	25,06	0,99	33,40	1,31
GMV-W-C-W01-1 1/4"	DN32	1.1/4"	34,16	1,34	42,16	1,66
GMV-W-C-W01-1 1/2"	DN40	1.1/2"	42,36	1,67	48,26	1,90
GMV-W-C-W01-2"	DN50	2"	53,26	2,10	60,33	2,38
GMV-W-C-W01-2 1/2"	DN65	2.1/2"	66,93	2,64	73,03	2,88
GMV-W-C-W01-3"	DN80	3"	82,80	3,26	88,90	3,50
GMV-W-C-W01-4"	DN100	4"	107,00	4,21	114,3	4,50